



COMFORT CONTROL

Using the Comfort Control gives the Body Spa a whole new way to conserve. Simply twist the cylinder to reduce the water flow to a trickle and back again to super charge the flow with up to 10 times the oxygen.

SUSTAINABILITY

Oxygenics technology saves thousands of gallons of water per fixture per year in demanding commercial and residential environments. Conserving water and natural resources is one way to move towards sustainability. Using a water-conserving showerhead not only saves water, but it also saves energy.

PERFECT FOR RVs

With the use of the comfort control the Body Spa is even more environmentally friendly with the ability to reduce the flow to a trickle with a simple twist making it perfect for RVs.


High Performance Showering

Designed to save 20-70% of water used by traditional shower fixtures, the Oxygenics Body Spa shower ensures a superior and refreshing shower experience everytime. The moment you turn on the water you'll realize this is like no other showerhead you've ever experienced.



There is no other showerhead brand on the market that uses the patented core technology of Oxygenics showerheads and no other showerheads are able to deliver the same powerful pressurized results.

The innovative design injects air into the water stream as the accelerator fin increases the velocity of the outbound water. The result is a powerful full-body oxygenated spray that feels amazing and saves water and money at the same time.

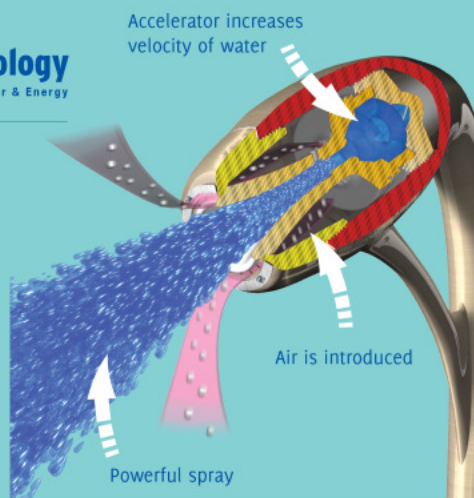

FEATURES

Water Saving



Money Saving



Easy Install



Lifetime Warranty



60" Hose



Flow Control



AVAILABLE FLOW RATES

2.5 GPM MAX

AVAILABLE STYLES

Handheld



AVAILABLE FINISHES

Chrome



Brushed Nickel



White



Super charge your shower at www.oxygenics.com. Call 1.800.344.3242 or 209.529.3546.

Email sales@oxygenics.com for more.

You will find your Oxygenics® eco-Showerhead and expert water and electricity saving advice at:

oxygenics® Body Spa®

HANDHELD

MODEL	FINISH	MAX FLOW RATE
130-xf25	Chrome	2.5
12121	Brushed Nickel	2.5
100-xf25	White	2.5

Includes: (1) Wand, (1) Flow Control Valve (1) 60" Hose, (1) Holder, Teflon Tape, Installation Instructions

FEATURES & BENEFITS

Self-Pressurizing Technology

Increased water velocity + air induction = MORE PRESSURE. The patented design ensures an invigorating pressurized shower spray regardless of water pressure.

Saves Water and Money

Oxygenics uses 20-70% less water compared to industry leading brands. Each showerhead can save thousands of gallons of water per year which means significant energy and money savings.

Flow Control Valve

Minimizes water flow to increase water savings. Adjusts from full spray to trickle.

No Clogging - Zero Maintenance

The internal components are made of Delrin® - a material similar to Teflon® which increase durability and eliminates clogging, mineral build-up and corrosion. No cleaning or maintenance required!

Limited Lifetime Warranty

The Oxygenics Body Spa comes with a lifetime performance warranty against clogging. It's guaranteed not to clog - EVER.

Product dimensions:
5.1 x 22 x 15.8 cm

Weight:
730g

The Oxygenics Body Spa Series meets ANSI standard testing and materials specifications A112.18.1M-1996.

Designed to function appropriately at pressures no less than 20 psi. Constructed to withstand pressures of 150 psi and temperatures up to 160° F.

The internal components are constructed of injection molded Delrin acetal. The pieces are machine pressed into the base and cannot be removed with a straight pushing or pulling force of less than 100 lbs.

The cores are constructed of Delrin acetal resin. Each core spray uses a venturi system consisting of 16 air entrance ports, which allow air to increase the spray velocity. Oxygen levels in the water are increased as well.


The showerhead face and outer shell is made of plated ABS plastic enhancing the showerhead's appearance and muffling the spray functions.

The wand holder utilizes a ball and socket allowing for adjustment. Ball is constructed with Delrin acetal. The seating washer is designed to seal around the ball swivel when compressed by assembly. Bases fit any standard 1/2" male threaded shower arm.

The 60" hose and holder are constructed of ABS plastic, aluminum, and zinc. Both are designed to withstand pressures of up to 100 psi.

Lifetime warranted against clogging and defective material and workmanship.

Water Pressure / Showerhead Flow Rate Relationship Oxygenics and Conventional Showerheads Based on Official Eskom test results

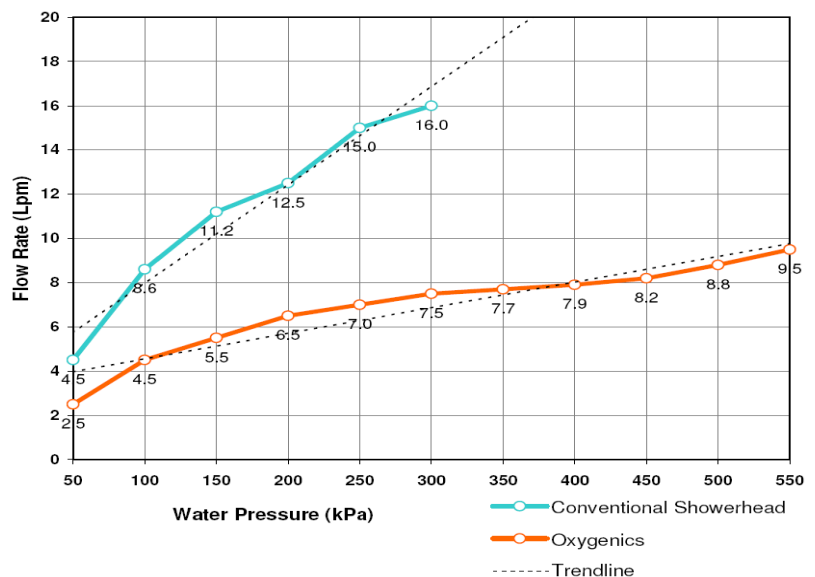

Flow restrictors have been placed in showerheads by manufacturers as a way to keep water usage at 2.5 GPM since it was mandated by the U.S. Government in 1992. This method of water restriction significantly decreases water pressure creating unsatisfactory shower performance. Oxygenics showerheads contain no removable restrictors and adapt to the incoming water pressure to use only what is necessary while still providing an extremely enjoyable and pressurized shower which saves a significant amount of water, energy and money.

While other industry-standard showerheads flow at 2.5 GPM at 60 PSI (national water pressure average), the Oxygenics Evolution flows at 2.0 GPM at 60 PSI, offering 20% water savings. Not only is this savings significant in reducing water, but it also reduces energy costs as less hot water is used.

As illustrated in the chart above, Oxygenics showerheads adapt to the incoming water pressure, so as the pressure decreases, more water and energy savings can be expected compared to industry-standard showerheads that have a constant flow of 2.5 GPM. In some cases, as much as 70% water and energy can be saved by using Oxygenics showerheads..

Super charge your shower at www.oxygenics.com. Call 1.800.344.3242 or 209.529.3546.

Email sales@oxygenics.com for more.

You will find your Oxygenics® eco-Showerhead and expert water and electricity saving advice at: